


# 40M IR VARI-FOCAL LENS DOME CAMERA

DI-320IPS-VF

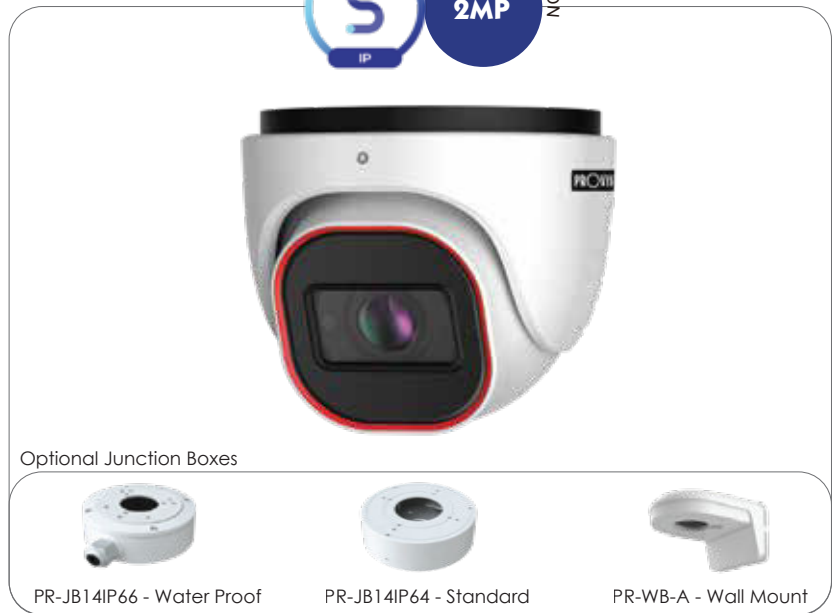

1/2.9" CMOS Sensor  
2 Mega-Pixel  
True Day & Night (IR Cut Removable)  
H.265 (HEVC) Compression  
0 Lux (IR On) Min. Illumination

ONVIF  
Digital WDR  
3D Noise Reduction  
Motion Detection and Privacy Masking  
Basic Analytics

Built-in Microphone  
2.8-12mm VF Lens  
40m IR Illumination  
PoE Support  
IP 67 Protection

Micro SD Card Support

## Specifications

Camera	Video	Model	DI-320IPS-VF
		Image Sensor	1/2.9" CMOS (16:9)
		Effective Pixels	1920x1080
		Electronic Shutter	1/25s ~ 1/100000s
		Frame Rate	1-25/30FPS
	Day & Night	ICR	
		Min. Illumination	Day: 0.1lux / Night: 0.013lux (@F2.0, AGC On) 0lux with IR on
	Audio	Audio compression	G.711A/G.711U
		Communication	One-way Audio
	Image Processing	Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement		Digital WDR, BLC, HLC, ROI	
Noise Reduction		3D-DNR	
Image Orientation		Mirror/Flip	
Privacy Zone		Yes	
Motion Detection		Yes	
Analytics	Analytics	Basic Camera Tampering, Line Crossing, Sterile Area	
	Compression	H.265 / H.264 / MJPEG (Sub-Stream Only)	
Compression	Resolution	2MP (1920x1080) / D1 (704x576) / QVGA (480x240) / CIF (352x288)	
	Multi-Stream	Master Stream: 2MP (1920x1080) / 1MP (1280x720) (1~30fps) Sub-Stream: QVGA/D1/CIF (1~30fps)	
	Bit rate	64Kbps ~ 4Mbps@H.265 / 64Kbps ~ 6Mbps@H.264	
	Encode Mode	VBR/CBR	
	Image Quality	Five levels under VBR; Free adjustment under CBR	

Housing	IR Distance	40m (3 High Power IR LED)
	Lens (Field of View)	2.8-12mm (88°-34.8°)
	Iris	Fixed Iris
	Lens Mount	Ø14 Mount
	Protection Rate	Water Proof: IP67
	Bracket	3-Axis Bracket
Connectivity	Dimensions	Ø113mm×99.6mm
	Weight(gross)	~640g
	Network	RJ45 (+PoE)
	Power	DC Socket
	Analog Video Output	No
	Audio Connectivity	Built-In Microphone
Network	SD Card	Event/Schedule based Main/Sub-Stream recording (Up to 128Gb)
	Hard Reset Button	Yes
	Alarm	No
	Remote Monitoring	IE Browsing, CMS Software, Provision Cam2 Mobile App
	User Access	Supports simultaneous monitoring for up to 3 users with multi-stream real time transmission
	Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
Others	ONVIF	Yes
	Ethernet	100Mbps
Others	PoE	Yes
	Power Supply	DC12V/~900mA / PoE/~10W
	Work Environment	-30°C~60°C, 10%~90% Humidity

